



挖宝乐W25配置参数表
WABAOL W25 Configuration Parameter Table

型号		单位	W25
铲斗容量		立方米	0.054
标准铲斗宽幅：带/不带边齿		毫米	450/400
操作重量		千克	2,420
机体尺寸	全长	毫米	3,910
	全高	毫米	2,370
	全宽	毫米	1,300/1,500
	最低高地间隙	毫米	185
发动机	型号	-	洋马3TNV80F
	总排气量	毫升	1.267
	额定输出功率	功率kw/转速	15.2kw/2500rpm
挖掘性能	最大挖掘高度	毫米	3,945
	最大卸料高度	毫米	2,660
	最大挖掘深度	毫米	2,120
	最大垂直挖掘深度	毫米	1,900
	最大挖掘半径	毫米	4,120
	大臂可偏移量：（左/右）	毫米	620/590
	前部最小回转半径（摆动时）	毫米	1,850(1,430)
	后部最小回转半径	毫米	710
	最大挖掘力（铲斗）	千牛顿(千克力)	18.4(1,880)

Model Number		Nuit	W25
Bucket capacity		CM	0.054
Standard bucket width:with/without side teeth		MM	450/400
Operating weight		KG	2,420
Body size	Total length	MM	3,910
	Full height	MM	2,370
	Overall width	MM	1,300/1,500
	Minimum ground clearance	MM	185
Engine	Model number		Yanmar3TNV80F
	Total displacement	MM	1.267
	Rated output power	Power kw/rpm	15.2kw/2500rpm
Mining performance	Maxdimum excavation herght	MM	3,945
	Maximum discharge height	MM	2,660
	Maximum digging depth	MM	2,120
	Maximum vertical digging depth	MM	1,900
	Maximum excavation radius	MM	4,120
	Large arm offset:(left/right)	MM	620/590
	Minimum front turning radius	MM	1,850(1,430)
	Minimum turning radius of the rear	MM	710
	Maximum digging force	Kilonewtons	18.4(1,880)

型号		单位	W25
履带	履带类型	-	铁履带
	履带宽度	毫米	250
行走部分	履带全长	毫米	1,860
	轮间距	毫米	1,475
	履带中心距	毫米	1,050/1,250
	行驶速度(低速/高速)	千米/小时	2.2/3.7
	爬坡能力	度	30
回转速度(转/分)		-	8.5
推土板	推土板(宽)	毫米	1,300/1,500
	推土板(高)	毫米	292
	提升距离(GL上/下)	毫米	260/325
液压泵类型		-	柱塞泵
回转马达类型		-	柱塞马达
行驶马达类型		-	2速柱塞液压马达
燃油箱容量		升	28

Model Number		Nuit	W25
Caterpillar belt	Track type		Iron track
	Track width	MM	250
Walking part	Ttack length	MM	1,860
	Wheel pitch	MM	1,475
	Track center distance	MM	1,050/1,250
	Travel speed(low/high speed)	Km/h	2.2/3.7
	Climbing ability	Angle	30
Turning speed(RPM)			8.5
Dozer plate	Dozer plate	MM	1,300/1,500
	Dodging plate(height)	MM	292
	Lift distance(GL up/down)	MM	260/325
Hydraulic pump type			Plunger Pump
Rotary motor type			Plunger motor
Travel motor type			2speed plunger hydraulic motor
Fuel tank capacity		l	28

W25

小巧精悍 建设精灵
Small and Strong Construction Spirit

额定功率(Rated Power): 15.2KW/2500rpm
整机重量(Machine Weight): 2420kg
标准斗容(Standard Bucket Volume): 0.054m³



全面升级 更高价值
Fully up graded for higher value



新动力
new power



新技术
new technology



新造型
new shape



更节能
more energy-efficient



更环保
more environmentally friendly



更可靠
more reliable

青岛挖宝乐机械设备有限公司

QINGDAO WABAOL MACHINERY EQUIPMENT CO.,LTD.

电话:0532-58081158

地址:山东省青岛市胶州市上合示范区赣江路7号

PHONE:0532-58081158

ADD:No. 7,Ganjiang Road, Shanghe Demonstration Zone,Jiaozhou City,Qingdao City

无尾配重

Tailless counterweight

无尾机的回转在挖掘机进行 360° 旋转时，其尾部不会超过履带板的范围，无需担心车身会增挂到障碍物。体型小巧，牺牲尾部配重空间来换取更大的操作空间，灵活方便，适应多种工况。

When the excavator rotates 360°, its tail will not exceed the range of the track plate, and there is no need to worry that the body will increase to the obstacle. Small size, sacrifice the tail weight space in exchange for greater operating space, flexible and convenient, adapt to a variety of working conditions.

推土铲全面升级

The bulldozer blade has been fully upgraded

新结构推土铲，加高、加宽铲板，辅助施工更加方便快捷，提高工作效率。

New structure dodging shovel, increased height, wider shovel plate, auxiliary construction is more convenient and quick, improve work efficiency.

一机多用

One machine for multiple purposes

标配大通径、大流量、高压辅助管路，可配备不同的属具进行多重作业，操作更加方便快捷。

New structure dodging shovel, increased height, wider shovel plate, auxiliary construction is more convenient and quick, improve work efficiency.

底盘伸缩功能

Chassis expansion function

可伸缩行走架宽度调整范围在1300–1500mm，提高了整机的稳定性。底盘伸缩功能使设备具有更好的通过性，施工中底盘伸出，更好地稳定性。

The width adjustment range of the retractable walking frame is 1300–1500mm, which improves the stability of the whole machine. The chassis expansion function enables the equipment to have better passability, and the chassis is extended during construction for better stability.

动力系统

Dynamic system

W25搭载日本洋马YANMAR发动机，符合国四、北美EPA4、欧五排放标准。动力强劲，可靠耐用，满足客户多元化的动力需求。

The W25 is equipped with a Japanese YANMAR engine, which meets the National IV, North American EPA4 and Euro V emission standards. Strong power, reliable and durable, to meet the diversified power needs of customers.



液压系统

Hydraulic system

革新的三泵系统，基于苛刻、近乎完美的发动机和液压系统的匹配技术，采用革新的三泵系统，增加功力输出，提高作业效率，降低了燃油消耗。


The innovative three-pump system, based on the demanding, near-perfect matching technology of the engine and hydraulic system, uses an innovative three-pump system to increase power output, improve operational efficiency and reduce fuel consumption.

挖宝乐W25作业范围图（单位mm）

WABAO W25 Operation Scope Diagram (unit mm)

外形尺寸图

Outline Dimension Drawing

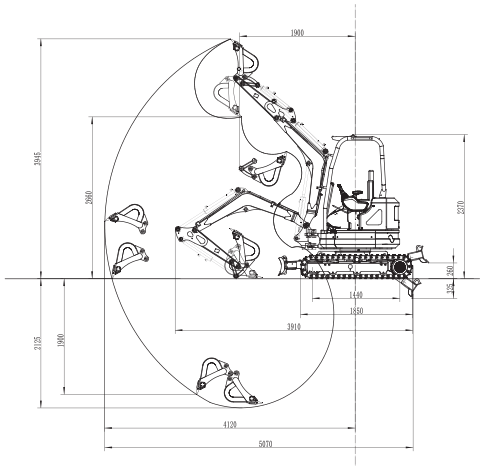

作业范围图

Scope of Work Diagram

